



# WATERPROOFING CONCRETE PLACEMENT AND FORMING PRODUCTS

BUILDING TRUST



# CONCRETE PLACEMENT AND FORMING PRODUCTS

## PLACEMENT PRODUCTS



**ELEPHANT TRUNK** is a flexible PVC chute used to confine and direct concrete during placement in forms. Hoppers, Collars, and Clamps are convenient accessories for safely and efficiently funnelling concrete into the Elephant Trunk. Elephant Trunks are shipped in 50' rolls but should not be used in lengths greater than 25 feet.

| Cat. No. | Diameter |
|----------|----------|
| 681      | 6"       |
| 682      | 8"       |
| 683      | 12"      |



**STAINLESS STEEL COLLARS** are available for 8" and 12" diameter Elephant Trunks and enable a quick release from the Hopper.


| Cat. No. | Diameter |
|----------|----------|
| 688      | 8"       |
| 689      | 12"      |



**CONCRETE TREAMIES** are manufactured from high density polyethylene in 4 ft. lengths. They taper from 9" to 8" or from 13" to 12".

| Cat. No. | Diameter        |
|----------|-----------------|
| 142      | 9" to 8" x 4'   |
| 143      | 13" to 12" x 4' |

## FORMING PRODUCTS



**ZIPCAP 2-PIECE CONTROL JOINT FORMER** eliminates saw cutting and creates a control joint with excellent aggregate interlock. Installs easily in fresh concrete.


| Cat. No. | Depth  |
|----------|--------|
| 855      | 1"     |
| 856      | 1-1/2" |
| 857      | 2"     |

ACI GUIDELINES suggest 1/4" of sub depth for sawcut or Zipcap depth.




**EXPANSION BOARD CAP** fits over an expansion board to prepare the joint for caulks or sealants. After the concrete is placed, the upper cap is removed leaving a clean void for sealants.

| Cat. No. | 940        | 941        | 942        | 943      |
|----------|------------|------------|------------|----------|
|          | 3/8"       | 1/2"       | 3/4"       | 1"       |
|          | 1/2" board | 1/2" board | 3/4" board | 1" board |



**No. 521 PLASTIC KEYWAY** is a lightweight, impact resistant keyway former that can be easily stapled or nail to wood forms.





**No. 484 3-IN-1 HOPPERS** are constructed from highly durable, yet lightweight plastic for easy handling. The intake is 36" square with a graduated discharge that can be trimmed to fit 6", 8", and 12" diameter Elephant Trunks.




**HEAVY DUTY HOPPERS** 36" square, heavy duty, blue hopper is steel reinforced for added stability featuring an 8" or 12" discharge which can be used with our Elephant Trunk.



**No. 690 STEEL BANDING CLAMPS** are universally sized for securing any Elephant Trunk to Hoppers or Collars.




**CHAMFER STRIPS** are flexible PVC strips used for forming rounded or angled edges in columns, walls, or other concrete elements. They are reusable, can prevent leakage, and are ideal for radius applications in round columns. Chamfer profiles are shipped in 8' lengths.



**RADIUS WITH TAIL**

| Cat. No. | Radius |
|----------|--------|
| 602      | 1/2"   |
| 603      | 3/4"   |
| 604      | 1"     |



**TRIANGULAR WITH TAIL**


| Cat. No. | Ref.   |
|----------|--------|
| 611      | 1/2"   |
| 612      | 3/4"   |
| 613      | 1"     |
| 614      | 1-1/2" |



**TRIANGULAR**

| Cat. No. | Ref. |
|----------|------|
| 621      | 1/2" |
| 622      | 3/4" |
| 623      | 1"   |

# GLOBAL BUT LOCAL PARTNERSHIP

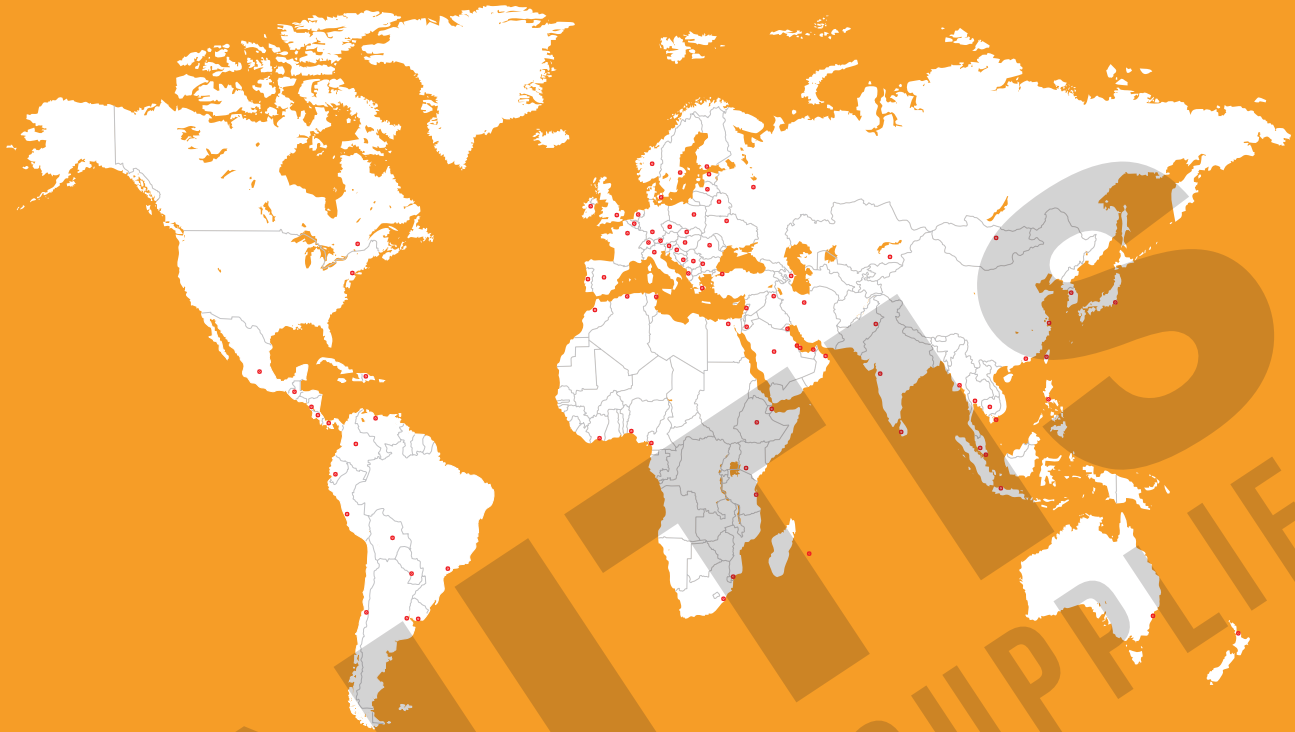

The sale of all Sika products are subject to the following Limited Warranty:

**LIMITED MATERIAL WARRANTY**

Sika warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor.

**NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Our most current General Sales Conditions shall apply. Please consult the Product Data Sheets prior to any use and processing.

Contact Sika Team 800.325.9504 ■ Website [usa.sika.com](http://usa.sika.com)

For up to date and accurate information please consult the current Product Data Sheet at [usa.sika.com](http://usa.sika.com)

**SIKA CORPORATION**

Sika Saint Louis Sales Office  
3400 Tree Court Industrial Blvd.  
St. Louis, MO 63122  
USA

**Contact**

Phone: 800.325.9504  
Fax: 800.551.5145  
[usa.sika.com](http://usa.sika.com)

**BUILDING TRUST**



© Sika Corporation / Target Market Concrete / 072329.5 / 04/2024