



FODS INSTALLATION ANCHORING ACCESSORIES

ANCHORING DATA SHEET

GENERAL INFORMATION


To ensure proper performance and safety, FODS Trackout Control Mat System must be anchored in place. Proper anchoring procedure will vary depending on use and substrate condition. FODS Concrete Screw Anchors or FODS Round Head Form Stakes should be used to secure mats in place. FODS anchoring systems are sold separately.



Know what's below.
Call before you dig.

SKU 5450 - 6" Concrete Screw Anchor

Length: 6" | Diameter: 3/4" | Hex Head Size: 1 1/8"
Minimum Hole Depth: 6 1/2" (Includes 1/2" overdrill)
Recommended for use with asphalt or concrete substrate

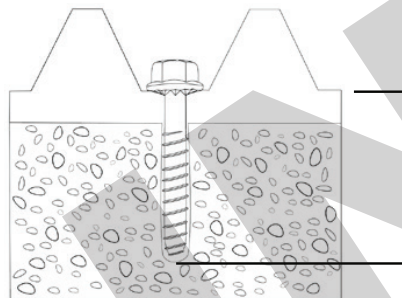

SKU 5180RS - 18" Round Head Stake Anchor

Length: 18" | Diameter: 3/4"
Recommended for use with soil or aggregate substrate



NUMBER OF ANCHORS

While the number of anchors varies based on substrate and traffic volume, FODS recommends a minimum of five anchors per mat.

FODS | THE MUD STOPS HERE | GETFODS.COM | 1-844-200-3637