

Distributed By:

UNITIS

CONTRACTOR SUPPLIES

San Diego: 1-858-332-2133

El Cajon: 1-619-270-7100

Buena Park: 1-714-522-0055

Corona: 1-951-231-9700

www.unitisonline.com

BUILDING TRUST



PRODUCT DATA SHEET

Sikagard[®]-7600 HG

TWO COMPONENT POLYURETHANE, HORIZONTAL GRADE, BITUMEN MODIFIED WATERPROOFING MEMBRANE

PRODUCT DESCRIPTION

Sikagard[®]-7600 HG is a two-component, horizontal grade, liquid applied, asphalt extended polyurethane waterproofing membrane/coating system.

USES

- Waterproofing
- Tank Liner
- Pond Liner
- Cooling Tower liner
- Potable Water Containment
- Reservoirs
- Planters
- Plaza/Pool Decks with Vegetation
- Hybrid Traffic system base coat over asphaltic surfaces

CHARACTERISTICS / ADVANTAGES

- Flexible system that bridges cracks and joints
- Handles full water immersion conditions
- Impervious to water and aqueous chemicals
- Meets California VOC and AQMD Requirements, Including SCAQMD Areas
- ANSI / NSF 61 Approved for contact with Potable Water
- Abrasion Resistant
- UV Stable
- Complies with LADBS AC-L021: Acceptance Criteria for Below-Grade Exterior Damp-Proofing and Waterproofing Materials requirements for materials that are unexposed, unreinforced sheet membrane barrier.
- City of Los Angeles Research Report: 26199

PRODUCT INFORMATION

Packaging	18 gal. kit - 4 x 4.5 gal. pail A+B 3 gal. kit - 3 x 1 gal. pail A+B
Appearance / Color	Component A Transparent Component B Black
Shelf Life	12 months from date of manufacture in original, factory-sealed containers.
Storage Conditions	Store indoors at a temperature between 60–95 °F (15–35 °C)
Density	comp. B: 8 lbs/gal comp. A: 10.1 lbs/gal Mixed & Cured: 8.3 lbs/gal
Solid content by mass	95 ± 2 % (ASTM D-236)
Solid content by volume	89 ± 2 % (ASTM D-2697)

Product Data Sheet

Sikagard[®]-7600 HG

January 2021, Version 01.06

020303020030000012

soon as possible.

- Do not dilute under any circumstance.
- Cured Sikagard®-7600 HG may be placed in service within 24 hours for non-aggressive service and with no potable water.
- Other Sikagard®-7600 HG service applications including immersion in potable water applications may require a cure time of a minimum 96 hours or more. Please contact Sika Technical Service for recommended application.
- This product is available only in black color. Can be exposed to direct sunlight. Initially after application it is shiny black then after a few months it will turn dull after being exposed to direct sunlight.
- Observe the curing time before immersion into and service in potable water. Please see Disinfection and cleaning guide.
- To avoid dew point conditions during application, relative humidity must be no more than 95 % and substrate temperature must be at least 5 °F (3 °C) above measured dew point temperatures.
- Minimum ambient and substrate temperature during application and curing of material is 41 °F (5 °C); maximum is 95 °F (35 °C). Surface temperatures must be no higher than 110 °F (43 °C).
- New concrete must be cured a minimum of 28 days prior to application.
- Do not store materials outdoors exposed to sunlight and moisture for prolonged periods.
- Do not apply to substrate surfaces where moisture vapor transmission will occur during application and cure. This condition should be checked using ASTM D-4263 (Polyethylene Sheet method).
- Substrate must be dry prior to application. Do not apply to a frosted, wet or damp surface. Allow sufficient time for the substrate to dry after rain or inclement weather, as there is the potential for bonding problems.
- **On substrates likely to exhibit outgassing apply during falling ambient and substrate temperature. If applied during rising temperature pin holing may occur.**
- **Do not apply when substrate is in direct sunlight.**
- Precautions should be taken to prevent vapors and/or odors from entering the building/ structure, including but not limited to turning off and sealing air intake vents and through-wall air conditioners, and other means of vapor/odor ingress during application and cure. Please see Applying within Confined Spaces manual.
- Any repairs required to achieve a level surface must be performed prior to application (consult a Sika representative for guidance on various product solutions). Surface irregularities may reflect through the cured system.
- When applying over existing coatings or membranes compatibility and adhesion testing, subsequent approval by Technical Services is required.
- Do not thin or batch down the material. Do not mix Sikagard®-7600 HG by hand; mechanically mix only.
- Unvented metal pan, split/sandwich slab with encapsulated membrane and/or insulation, cinder fill

decks, and lightweight insulating concrete overlays should not be covered with Sika membrane systems without additional deck evaluation to determine substrate moisture content and subsequent approval by Technical Services.

- If Sikagard®-7600 HG is used as split slab waterproofing membrane or buried membrane cover the final coat of Sikagard®-7600 HG with an approved drainage mat (Sika® Drain 420) or protection board.
- Application over asphalt as traffic coating Base Coat: Please contact Sika Technical Service. Must use Sikalastic Recoat Primer.

ENVIRONMENTAL, HEALTH AND SAFETY

For further information and advice regarding transportation, handling, storage and disposal of chemical products, user should refer to the actual Safety Data Sheets containing physical, environmental, toxicological and other safety related data. User must read the current actual Safety Data Sheets before using any products. In case of an emergency, call CHEMTREC at 1-800-424-9300, International 703-527-3887.

APPLICATION INSTRUCTIONS

SURFACE PREPARATION

Surface must be clean, dry and sound with an open texture. Remove dust, laitance, grease, curing compounds, bond inhibiting impregnations, waxes, and any other contaminants. All projections, rough spots, etc. should be dressed off to achieve a level surface prior to application.

Concrete - New concrete must be cured a minimum of 28 days prior to application. Old concrete must be free of loose aggregate, dirt and be dry. New and old concrete should be Shot-, Water- or Abrasive-blasted. Grease spots and oil should be chemically cleaned with appropriate cleaners or mechanically removed .

Asphalt - New asphalt must be cured a minimum of 28 days prior to application. Old asphalt must be free of loose aggregate, dirt and must be dry. New and old asphalt should be Shot-, Water- or Abrasive-blasted. Lower ambient temperature will help to make cleaning process more effective. Grease spots and oil must be cleaned with appropriate cleaners or mechanically removed.

Metal - Must be thoroughly cleaned by grinding or blast cleaning to a white metal surface. Be aware of dew point and check it before every application on metal surface.

Plywood - The only acceptable grade of plywood is APA rated exterior grade or better. The appearance and physical characteristics of the plywood and grade should be considered. Plywood should be new or cleaned and sanded.

Priming: To promote adhesion and minimize outgassing, priming is recommended on all surfaces except for new plywood. New plywood priming is optional.


- **Concrete, Old Plywood** - Sikalastic® PF Lo-VOC Primer, Sikalastic® FTP Lo-VOC Primer, Sikalastic® EP Primer/Sealer
- **Metal** - Sikalastic® PF Lo-VOC Primer, Sikalastic® EP Primer/Sealer
- **Asphalt** - Sikalastic® Recoat Primer, Sikalastic® EP Primer/Sealer

APPLICATION

Mixing

It is essential that proper mixing methods and tools are used to ensure proper application of Sikagard®-7600 HG.

- **Mixing Drill:** Low Speed Mixing Drill (400-600 rpm)
- **Mixing Paddle:** Jiffy Mixer (5-50 Gallon Model) or Mud Mixing Paddle (9-5/8" WIDE x 6-1/4" DEEP)
- **Premixing:** Premix each pail of Sikagard®-7600 HG Part-B (4.05 gal.) using the recommended drill and mixing paddle at slow speed for a minimum of 1.5 minutes to ensure Sikagard®-7600 HG Part B is a homogeneous mixture.
- **Mixing A & B component:** With mixing paddle in the Part-B, turn on mixing drill and begin mixing Sikagard®-7600 HG Part B, and while the mixing paddle is spinning slowly add one 0.45 gallon can of Sikagard®-7600 HG Part-A to the center of the vortex created by the mixing paddle. Once Part-A has been added, mix continuously for an additional 3 minutes using a very slow up and down motion, making sure full pail is mixed evenly, including the sides of the pail.
- **NOTE:** Take care not to allow entrapment of air into the material. Do not mix in an aggressive up and down motion. Do not estimate mixing time. Do not thin. Do not hand mix. Mix the whole pail. Do not batch down. If a greenish hue can be seen at the top of the pail then product has not been mixed properly.

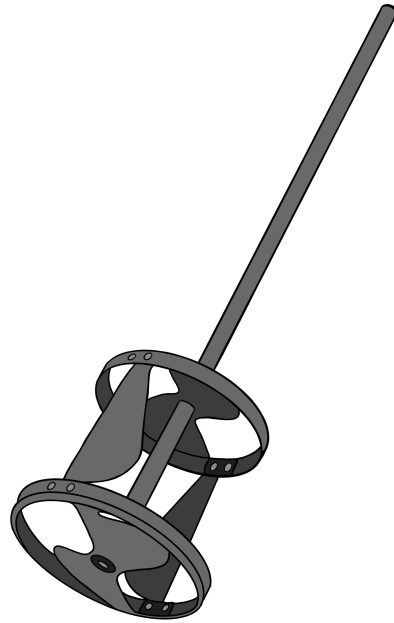



Top: Jiffy Style Paddle Bottom: Mud Mixing Paddle

Priming: When primer is required use the following coverages for concrete and metal; Sikalastic® FTP LoVOC primer at 200 sq. ft./gal or Sikalastic® PF Lo-VOC Primer at 200 sq. ft./gal. Apply using a brush or phenolic core roller. This will result in 8 dry mils of primer. Don't prime over an existing crack detail coat. For primer application over asphalt contact Sika Technical Services for recommendation. Due to age and porosity of asphalt coverage rates can change drastically.

NOTE: For rough or porous concrete or when outgassing is a concern, use Sikalastic® PF Lo-VOC Primer or Sikalastic FTP LoVOC Primer at an approximate rate of 180 - 230 sq.ft/1 gal. This rate may vary on the porosity of the substrate. The surface must be totally covered with primer with no dry spots or spots where the primer has completely absorbed into the substrate. Allow primer to become tack free before proceeding to the next phase.

Detailing:

Detail Coat: All cracks and joints between 1/16" – 1/8" must be detailed prior to installing Sikagard®-7600 HG. Any cracks or joints under 1/16" need no special detailing prior to installation of Sikagard®-7600 HG. To properly detail apply 6" wide and 30 mils of Sikagard®-7600 HG over all cracks and joints.

Application: Sikagard®-7600 HG can be applied at different thicknesses to accommodate different warranty requirements. For best results Sikagard®-7600 HG should be applied in two coats. Please follow the coverage rate section above to determine proper coverage for 30, 60, 90 mil coating layers. Allow to cure (4-6 hours or until surface is walkable without damaging the membrane) after initial coat and before proceeding. Sikagard® 7600 HG should be applied in the shade or during evening hours. When applying the direct sun light it's possible that the surface of the coating can cure too quickly and entrap solvent resulting in blisters.

Sikagard®-7600 HG can be applied over horizontal and vertical surface. Apply using a 3/8" roller or notched squeegee and back-roll. Please note that pot life for Sikagard®-7600 HG is only 30 minutes. The maximum application thickness on vertical surfaces is 45 mils.

Recoat: At 75 °F (24 °C) and 50 % relative humidity, recoating and multiple or second coats must be completed within 16 hours from the start of the previous applications of Sikagard®-7600 HG. After this 16 hour window, it is necessary to abrade, clean and prime with Sikalastic Recoat Primer.

OTHER RESTRICTIONS

See Legal Disclaimer.

LEGAL DISCLAIMER

- KEEP CONTAINER TIGHTLY CLOSED
- KEEP OUT OF REACH OF CHILDREN
- NOT FOR INTERNAL CONSUMPTION
- FOR INDUSTRIAL USE ONLY
- FOR PROFESSIONAL USE ONLY

Prior to each use of any product of Sika Corporation, its subsidiaries or affiliates ("SIKA"), the user must always read and follow the warnings and instructions on the product's most current product label, Product Data Sheet and Safety Data Sheet which are available at usa.sika.com or by calling SIKA's Technical Service Department at 1-800-933-7452. Nothing contained in any SIKA literature or materials relieves the user of the obligation to read and follow the warnings and instructions for each SIKA product as set forth in the current product label, Product Data Sheet and Safety Data Sheet prior to use of the SIKA product.

SIKA warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Product Data Sheet if used as directed within the product's shelf life. User determines suitability of product for intended use and assumes all risks. User's and/or buyer's sole remedy shall be limited to the purchase price or replacement of this product exclusive of any labor costs. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKA SHALL NOT BE LIABLE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKA SHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Sale of SIKA products are subject to the Terms and Conditions of Sale which are available at <https://usa.sika.com/en/group/SikaCorp/termsandconditions.html> or by calling 1-800-933-7452.

Sika Corporation

201 Polito Avenue
Lyndhurst, NJ 07071
Phone: +1-800-933-7452
Fax: +1-201-933-6225
usa.sika.com

Sika Mexicana S.A. de C.V.

Carretera Libre Celaya Km. 8.5
Fracc. Industrial Balvanera
Corregidora, Queretaro
C.P. 76920
Phone: 52 442 2385800
Fax: 52 442 2250537



Product Data Sheet

Sikagard®-7600 HG
January 2021, Version 01.06
020303020030000012

Distributed By:



San Diego: 1-858-332-2133
El Cajon: 1-619-270-7100
Buena Park: 1-714-522-0055
Corona: 1-951-231-9700
www.unitisonline.com

Sikagard-7600HG-en-US-(01-2021)-1-6.pdf

